


# DECLARATION OF PERFORMANCE

*Paper Tape strip nails, clipped head  
Ring Shank – Bright Basic*



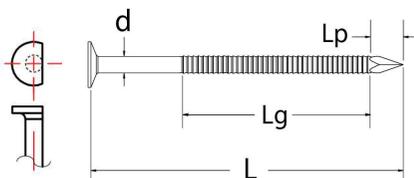
**Document No:** CE\_DOP\_NSD\_RB\_01  
for structural timber products

**Strips information:**  
Paper collated strip nails 34°, without pitch

**Finishing information:**  
Bright Basic **for Service Class 1 – according to EN 1995 – 1 – 1**










**Nail Dimensions:**  
Diameter: 2,9 and 3,1 mm  
Length: from 50 to 100 mm

**Properties of the material used:**  
- non alloy wire rod in accordance with EN 10016-1 to 4  
- tensile strength in accordance with EN 10218-1, min. 700 N/mm<sup>2</sup>



**The manufacturer declares for  
Ring shank nail, clipped head 34° paper collated, 2,9 and 3,1 mm:**

- a) That the product has been manufactured in accordance with EN 14592:2008+A1:2012 “Timber Structures – Dowel-type fasteners – Requirements”.
- b) Initial Type Testing has been performed to identify and confirm essential characteristic values in accordance with table ZA.1 in EN 14592. Those characteristic values are indicated together with the CE mark on product labels and in the table here below.
- c) Initial Type Testing was performed by VHT notified body 1503  
ITT Report No: 703-09/2,9-bright  
ITT Report No: 703-09/3,1-bright
- d) Assessment and verification of constancy of performance is in compliance with System 3.
- e) Any and all of the nails covered by this Declaration of Performance are identical to the nails that the ITTs were originally issued for. Neither the geometrical specification, raw wire or production process have undergone any changes that would affect the relevant properties of the nail according to 14592:2008+A1:2012, e.g. characteristic withdrawal parameter  $f_{ax,k}$ , head pull-through parameter  $f_{head,k}$ , characteristic yield moment  $M_{y,k}$  or corrosion protection as declared in the first place.

ARTICLE	NOMINAL DIAMETER d (mm)	NOMINAL LENGTH L (mm)	HEAD AREA A <sub>h</sub> (mm <sup>2</sup> )	POINT LENGTH L <sub>p</sub> (mm)	THREADED LENGTH L <sub>g</sub> (mm)		Withdrawal Parameter $f_{ax,k}$ (N/mm <sup>2</sup> ) *		Head Pull Trough Parameter $f_{head,k}$ (N/mm <sup>2</sup> ) *		Yield Moment M <sub>y,k</sub> (Nmm)
							EN 1382		EN 1383		EN 1009
NSD29/50RB	2,9	50	29,4	4	29,5		8,36		16,66		3060
NSD29/65RB		65	29,4	4	44,5		8,36		16,66		3060
NSD29/75XB		75	29,4	4	33,5		8,36		16,66		3060
NSD31/75XB	3,1	75	30,7	4,1	47,9		7,24		13,82		3490
NSD31/90XB		90	30,7	4,1	40,9		7,24		13,82		3490

\* tested in wood with a characteristic density of 350 kg/m<sup>3</sup>

2013 July 1st, Casalecchio di Reno

Marketing Manager, Valentina Ratti